

21.5", 24" Front IP65 Silver Aluminum Touch Monitor



Features

- Fanless and rugged design
- 5 Wires Resistive touch solution
- IP65 Silver aluminum front bezel
- Resolution 1920 x 1080 dpi
- VESA mount & Panel mount & Clip mount

Specifications

Model No.	SM215RS03	SM215RS04	SM240RS03	SM240RS04
DISPLAY				
Size	21.5" TFT (16:9)		24" TFT (16:9)	
Resolution	1920 x 1080		1920 x 1080	
Colors	16.7 M		16.7 M	
Luminance	300 cd/m2		250 cd/m2	
Contrast Ratio	3000:1		1000:1	
View Angle (H/V)	178°/178°		173°/165°	
HIGH BRIGHTNESS (OPTIONAL)				
Resolution	1920 x 1080		1920 x 1080	
Colors	16.2M		16.7M	
Luminance	1000 cd/m2		1000 cd/m2	
Contrast Ratio	2000 : 1		1000 : 1	
Viewing Angle (H/V)	176°/176°		170°/165°	
I/O PORTS				
VGA	V	V	V	V
DVI	V		V	
HDMI		V		V
DP		V		V
USB (for touch screen)	V	V	V	V
POWER REQUIREMENT				
Power Requirement	DC in 12V (60W)			
TOUCH SCREEN				
Touch Screen	5 Wires Resistive (one touch)			
OS SUPPORT				
OS support	Win Pro 10 / Embedded Win 7, 8, 10			
MECHANICAL & ENVIRONMENTAL				
Operation Temp.	0 ~ 45°C			
Storage Humidity	10 ~ 90%, non-condensing			
Mounting	VESA mount (100X100mm) & Panel mount & Clip mount			
Dimension (WxHxD)	581 x 337 x 74 mm		621 x 381 x 71 mm	
Weight	7.2 kg		7.2 kg	
OPTIONAL				
P/N: 2320000001	Optical Bonding			
P/N: 3080108001	HDMI 2m cable			
P/N: 3080109001	DP 2m cable			
P/N: 239SP17002	10pcs x Clips			
P/N: 3120600002	RS232 touch screen			
P/N: 3011100020	Waterproof sponge			
P/N: 309M106004	DC in 9V ~ 36V			

ORDERING INFORMATION


STANDARD

SM215RS03	21.5" Display, 5W resistive, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
SM215RS04	21.5" Display, 5W resistive, 1 x VGA, 1 x DP, 1 x HDMI , 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
SM240RS03	24" Display, 5W resistive, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
SM240RS04	24" Display, 5W resistive, 1 x VGA, 1 x DP, 1 x HDMI , 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter


HIGH BRIGHTNESS

SM215RJ03	21.5" Display, 5W resistive, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, 1000 cd/m2
SM215RJ04	21.5" Display, 5W resistive, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, 1000 cd/m2
SM240RJ03	24" Display, 5W resistive, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, 1000 cd/m2
SM240RJ04	24" Display, 5W resistive, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, 1000 cd/m2

SM240RS03

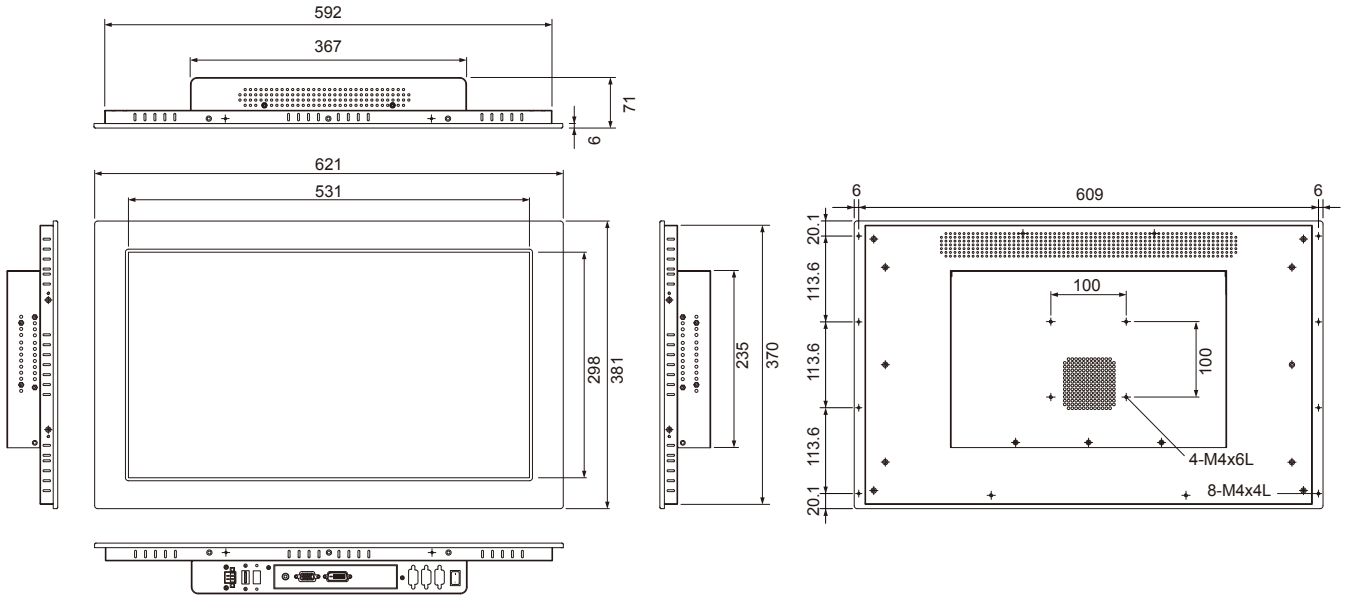

SM240RS04

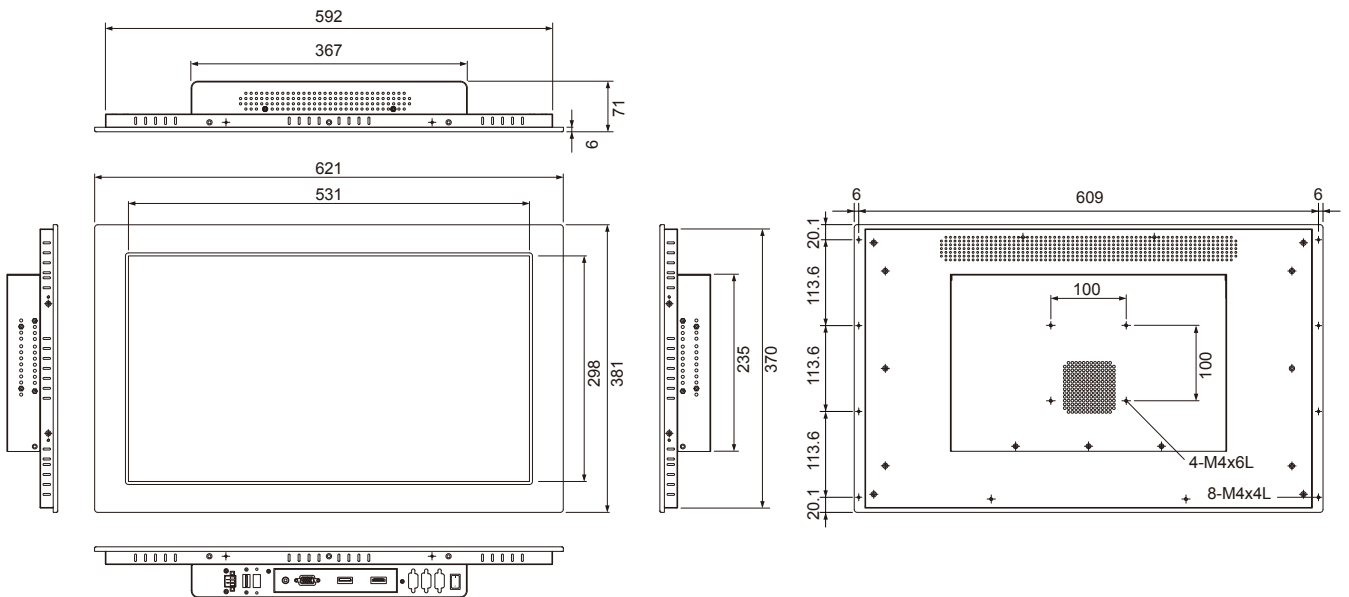

**Specifications are subject to change without notice.*