15.6”
Front IP66 Silver Aluminum Touch Monitor



Features

- Fanless and rugged design
- Wide temperature : -20~60°C
- True Flat PCT touch solution
- Resolution 1920 x 1080
- IP66 Silver aluminum front bezel
- VESA mount & Panel mount & Clip mount



Specifications


Model No.	TM157PW03	TM157PW04
DISPLAY		
Size	15.6” TFT (16:9)	
Resolution	1920 x 1080	
Colors	16.2M	
Luminance	400 cd/m2	
Contrast Ratio	500 : 1	
View Angle (H/V)	140°/120°	
I/O PORTS		
VGA	V	V
DVI	V	
HDMI		V
DP		V
USB (for touch screen)	V	V
POWER REQUIREMENT		
Power Requirement	DC in 12V (60W)	
TOUCH SCREEN		
Touch Screen	True Flat PCT touch	
OS SUPPORT		
OS support	Win Pro 10 / Embedded Win 7, 8, 10 / Win 10 IoT	
MECHANICAL & ENVIRONMENTAL		
Operation Temp.	-10~60°C	
Storage Humidity	10 ~ 90%, non-condensing	
Mounting	VESA mount (100X100mm) & Panel mount & Clip mount	
Dimension (WxHxD)	463 x 298 x 71 mm	
Weight	TBD	
OPTIONAL		
P/N: 2320000001	Optical Bonding	
P/N: 3080108001	HMDI 2m cable	
P/N: 3080109001	DP 2m cable	
P/N: 239SP17002	10pcs x Clips	
P/N: 3011100020	Waterproof sponge	

ORDERING INFORMATION	
TM157PW03	15.6” wide temperature display, true flat PCT, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
TM157PW04	15.6” wide temperature display, true flat PCT, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter


Dimensions

Unit : mm

TM157PW03

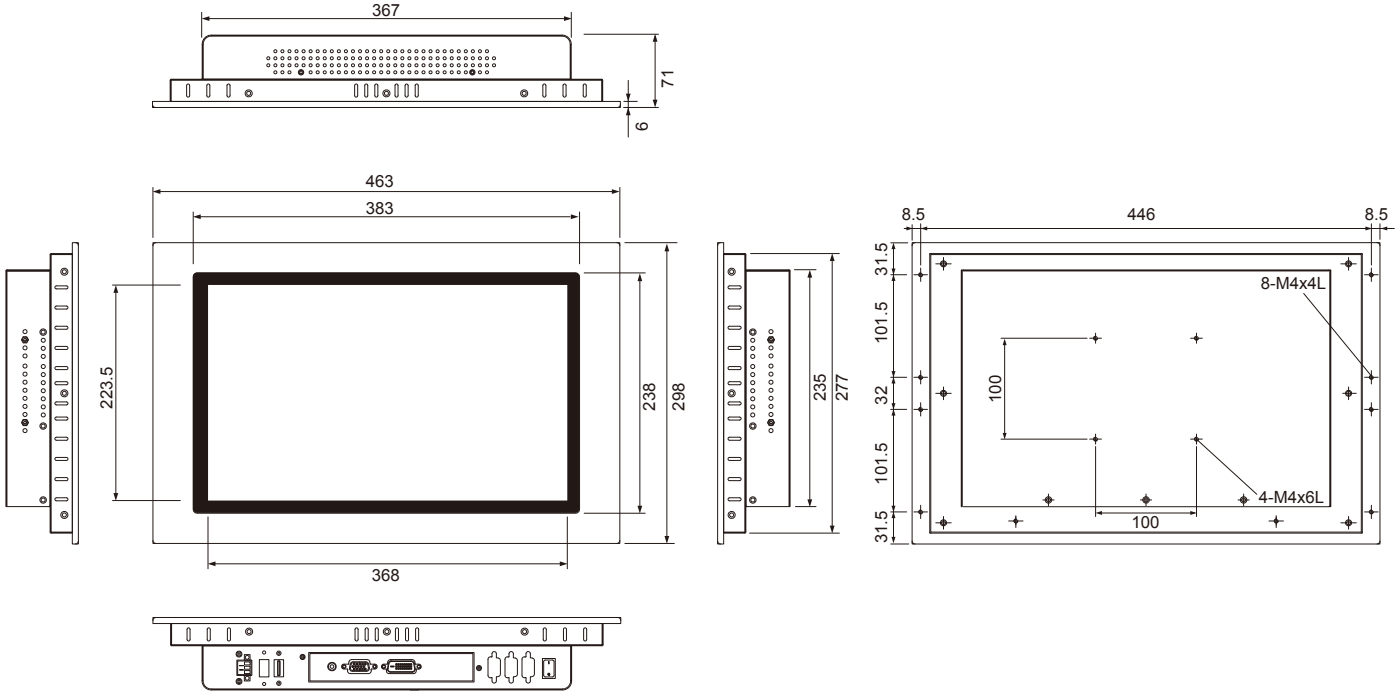

TM157PW04

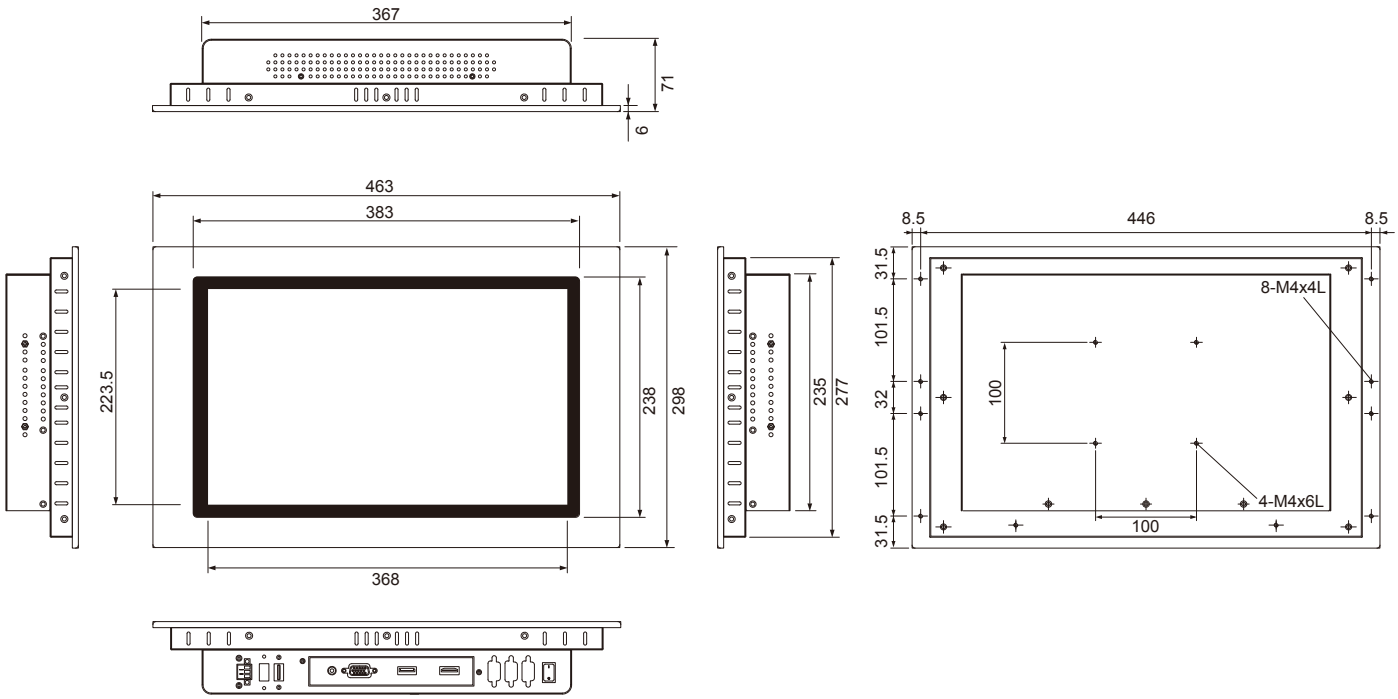

**Specifications are subject to change without notice.*